



Maze Nails

Product Specification Sheet

Hot-Dip Galvanized Ring Shank Asphalt & Fiberglass Shingle Nails

Stock Number: R103A

MATERIAL	Medium Carbon Steel
LENGTH	1-15/32" OAL
SHANK DIAMETER	0.121"
HEAD DIAMETER	.375"
SHANK STYLE	Ring Thread
POINT STYLE	40 degree diamond
COATING	Double Hot-Dip Galvanized
APPROX. NAILS PER LB	173.0

Product Description

Designed for the secure application of asphalt and fiberglass shingles on new construction and re-roofing jobs. Ring shank provides extra holding power, especially in high wind/hurricane areas. STORMGUARD® Double Hot-Dipped Zinc-Coating provides extra corrosion-resistance in sea coastal areas. Type 304 Stainless Steel Roofing Nails also available. Manufactured to meet federal spec. FFN-105-B and ASTM spec. A-153 for hot-dip zinc coating. Nails should be long enough to penetrate 3/4" into the wood deck lumber, or completely through plywood decking. All Maze Nails are 100% Made in the U.S.A. SIZES AND QUANTITIES COMMONLY USED On A New Roof – 1-1/4" - 320 nails per sq. or 1-3/4 lbs. Over An Old Roof – 1-3/4" - 320 nails per sq. or 2-1/4 lbs.





Maze Nails

Product Specification Sheet

Disclaimer: This image represents an entire series of nails, so the length may not be the exact match to the nail in this spec sheet

100% MADE IN THE USA



Maze Nails

Product Specification Sheet

Stainless Steel (304) Ring Shank Roofing Nails

Stock Number: SSRFG4A

MATERIAL	SS302HQ
LENGTH	1-15/32" OAL
SHANK DIAMETER	0.121"
HEAD DIAMETER	.375"
SHANK STYLE	Ring Thread
POINT STYLE	40 degree diamond
APPROX. NAILS PER LB	181.0

Product Description

These nails are made from highly corrosion-resistant Type 304 Stainless Steel for outstanding rust-protection. The strong steel shanks drive with great strength. Ring shank provides additional holding power.



Disclaimer: This image represents an entire series of nails, so the length may not be the exact match to the nail in this spec sheet

100% MADE IN THE USA

Generated on: 3/23/2021



Maze Nails

Product Specification Sheet


15° Hot-Dip Galvanized Ring Shank Roofing Nails

Stock Number: CLWR103A

MATERIAL	Medium Carbon Steel
LENGTH	1-15/32" OAL
SHANK DIAMETER	0.121"
HEAD DIAMETER	.375"
SHANK STYLE	Ring Thread
POINT STYLE	40 degree diamond
COATING	Double Hot-Dip Galvanized
COLLATION TYPE	15* Wire Coil
NAILS PER CARTON	3600.0

Product Description

Finally – a great hot-dip galvanized coating – and the convenience of being able to use a pneumatic coil roofing nailer! Ideal for the quality application of Asphalt and Fiberglass Shingles, blind-nailing Fiber Cement Siding, attaching Backerboard, nailing felt . . . and a myriad of other applications! Packed in convenient job packs of 3,600 nails. Ring shank. High wire weld collation. PROUDLY MADE IN THE U.S.A.!

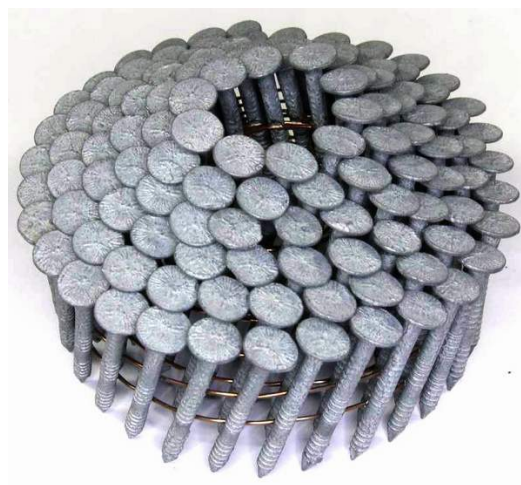

Disclaimer: This image represents an entire series of nails, so the length may not be the exact match to the nail in this spec sheet

100% MADE IN THE USA

Generated on: 3/23/2021



Maze Nails

Product Specification Sheet

15° Stainless Steel (304) Ring Shank Roofing Nails

Stock Number: CLWSSRFG4A

MATERIAL	SS302HQ
LENGTH	1-15/32" OAL
SHANK DIAMETER	0.121"
HEAD DIAMETER	.375"
SHANK STYLE	Ring Thread
POINT STYLE	40 degree diamond
COLLATION TYPE	15* Wire Coil
NAILS PER CARTON	3600.0

Product Description

These ring shank nails are made from Type 304 stainless steel for rust protection. Wire weld collation.



Disclaimer: This image represents an entire series of nails, so the length may not be the exact match to the nail in this spec sheet

100% MADE IN THE USA

Generated on: 3/23/2021