

**GENERAL INFORMATION**

**ZAMAC NAILIN®**

Nail Anchor

**PRODUCT DESCRIPTION**

The Zamac Nailin is a nail drive anchor which has a body formed from Zamac alloy. Drive nails are available in carbon or stainless steel. The anchor can be used in concrete, block, brick or stone.

A corrosion resistant Zamac alloy is used to form the anchor body with either a mushroom or flat head. The anchor can be used for light duty, tamperproof applications. The anchor is not recommended for overhead, life-safety or sustained tensile loading applications (see performance data section).

**GENERAL APPLICATIONS AND USES**

- Roof Flashing
- Mechanical Attachments
- Brick Ties and Masonry Anchorage
- Furring Strips
- Electrical Fixtures
- Maintenance

**FEATURES AND BENEFITS**

- + General purpose anchoring
- + Installs in a variety of base materials

**APPROVALS AND LISTINGS**


- Federal GSA Specification Meets the proof load requirements of FF-S-325C, Group V, Type 2, Class 3, (superseded) and CID A-A 1925A, Type 1 (mushroom head) & Type 2 (flat head)

**GUIDE SPECIFICATIONS**

CSI Divisions: 03 16 00 - Concrete Anchors, 04 05 19.16 - Masonry Anchors, and 05 05 19 - Post-Installed Concrete Anchors. Anchors shall be Zamac Nailin anchors as supplied by DEWALT, Towson, MD.

**SECTION CONTENTS**

General Information..... 1  
 Installation and Material Specifications ..... 1  
 Performance Data..... 2  
 Design Criteria ..... 3  
 Ordering Information..... 3



ZAMAC NAILIN

**ANCHOR MATERIALS**

Zamac Alloy body with Carbon or Stainless Steel Drive Nail

**ANCHOR SIZE RANGE (TYP.)**

- 3/16" diameter x 7/8" length to 1/4" diameter x 3" diameter

**SUITABLE BASE MATERIALS**

- Normal-Weight Concrete
- Concrete Masonry (CMU)
- Brick Masonry
- Stone

**INSTALLATION AND MATERIAL SPECIFICATIONS**

**Installation Specifications**

Dimension	Anchor Diameter, d		
	3/16" MH	1/4" MH	1/4" FH
ANSI Drill Bit Size (in.)	3/16	1/4"	1/4"
Fixture Clearance Hole (in.)	1/4	5/16	5/16
Head Height (in.)	7/64	9/64	3/16
Head Width (in.)	13/32	35/64	35/64

MH = Mushroom Head FH = Flat Head


**Material Specifications**

Anchor Component	Component Material		
	Mushroom Head CS Nail	Flat Head CS Nail	Mushroom Head SS Nail
Drive Nail	AISI 1018	AISI 1018	Type 304 SS
Anchor Body	Zamac Alloy	Zamac Alloy	Zamac Alloy
Nail Plating	ASTM B 633, SC1, Type III (Fe/Zn5)		N/A


CS = Carbon Steel SS = Stainless Steel

**Installation Guidelines**

Using the proper diameter bit, drill a hole into the base material to a depth of at least 1/4" deeper than the required embedment. The tolerances of the drill bit used should meet the requirements of ANSI Standard B212.15. Remove dust and debris from the hole during drilling (e.g. dust extractor) or following drilling (e.g. suction, forced air) to extract loose particles created by drilling.



Insert the anchor through the fixture and into the drilled hole. Drive the nail into the anchor body to expand it. Be sure the head is seated firmly against the fixture and that the anchor is at the proper embedment. Take care not to overdrive the nail. This anchor is not recommended for installations at an angle or for use overhead.



## PERFORMANCE DATA

### Ultimate and Allowable Load Capacities for Zamac Nailin in Normal-Weight Concrete<sup>1,2,3,4,5</sup>

Nominal Anchor Diameter d in.	Min. Embed. Depth in. (mm)	Minimum Concrete Compressive Strength, f'c											
		2,000 psi				4,000 psi				6,000 psi			
		Tension		Shear		Tension		Shear		Tension		Shear	
		Ultimate lbs. (kN)	Allowable lbs. (kN)	Ultimate lbs. (kN)	Allowable lbs. (kN)	Ultimate lbs. (kN)	Allowable lbs. (kN)	Ultimate lbs. (kN)	Allowable lbs. (kN)	Ultimate lbs. (kN)	Allowable lbs. (kN)	Ultimate lbs. (kN)	Allowable lbs. (kN)
3/16	3/4 (19)	285 (1.3)	70 (0.3)	415 (1.8)	105 (0.5)	400 (1.8)	100 (0.4)	560 (2.5)	140 (0.6)	480 (2.1)	120 (0.5)	560 (2.5)	140 (0.6)
	5/8 (16)	410 (1.8)	105 (0.5)	440 (2.0)	110 (0.5)	580 (2.6)	145 (0.6)	655 (2.9)	165 (0.7)	580 (2.6)	145 (0.6)	655 (2.9)	165 (0.7)
1/4	3/4 (19)	540 (2.4)	135 (0.6)	600 (2.7)	150 (0.7)	765 (3.4)	190 (0.8)	850 (3.8)	215 (1.0)	800 (3.6)	200 (0.9)	850 (3.8)	215 (1.0)
	1 (25)	620 (2.8)	155 (0.7)	640 (2.8)	160 (0.7)	875 (3.9)	220 (1.0)	890 (4.0)	225 (1.0)	895 (4.0)	225 (1.0)	890 (4.0)	225 (1.0)
	1-1/4 (32)	700 (3.1)	175 (0.8)	720 (3.2)	180 (0.8)	990 (4.4)	250 (1.1)	970 (4.3)	245 (1.1)	990 (4.4)	250 (1.1)	990 (4.4)	250 (1.1)

1. Tabulated load values are for anchors installed in concrete. Concrete compressive strength must be at the specified minimum at the time of installation.
2. Allowable load capacities listed are calculated using and applied safety factor of 4.0. Anchors are not recommended for use overhead or for life safety. Consideration of safety factors of 20 or higher may be necessary depending upon the application such as in sustained tensile loading applications.
3. Linear interpolation may be used to determine allowable loads for anchors at intermediate embedment depths and compressive strengths.
4. The tabulated load values are applicable to single anchors installed at critical edge and spacing distances. Allowable load capacities are multiplied by reduction factors when anchor spacing or edge distances are less than critical distances.
5. Anchors installed flush with face or end of concrete surface.

### Ultimate and Allowable Load Capacities for Zamac Nailin in Hollow Concrete Masonry<sup>1,2,3</sup>

Nominal Anchor Diameter d in.	Minimum Embedment Depth in. (mm)	f'm ≥ 1,500 psi (10.4 MPa)			
		Ultimate Load		Allowable Load	
		Tension lbs. (kN)	Shear lbs. (kN)	Tension lbs. (kN)	Shear lbs. (kN)
3/16	3/4 (19.1)	270 (1.2)	560 (2.5)	55 (0.2)	110 (0.5)
	5/8 (15.9)	360 (1.6)	655 (2.9)	70 (0.3)	130 (0.6)
1/4	3/4 (19.1)	735 (3.3)	850 (3.8)	145 (0.7)	170 (0.8)
	1 (25.4)	835 (3.8)	890 (4.0)	165 (0.7)	180 (0.8)
	1-1/4 (31.7)	990 (4.4)	970 (4.3)	200 (0.9)	195 (0.9)

1. Tabulated load values are for anchors installed in minimum 6-inch wide, minimum Grade N, Type II, lightweight, medium-weight or normal-weight concrete masonry units conforming to ASTM C 90. Mortar must be minimum Type N. Masonry compressive strength must be at the specified minimum at the time of installation (f'm ≥ 1,500 psi). Hollow masonry cells may also be grouted or solid.
2. Allowable load capacities listed are calculated using and applied safety factor of 5.0. Anchors are not recommended for use overhead or for life safety. Consideration of safety factors of 20 or higher may be necessary depending upon the application such as in sustained tensile loading applications.
3. Anchors installed flush with face or end of masonry surface.

### Ultimate and Allowable Load Capacities for Zamac Nailin in Solid or Hollow Clay Brick Masonry<sup>1,2,3</sup>

Nominal Anchor Diameter d in.	Minimum Embedment Depth in. (mm)	f'm ≥ 1,500 psi (10.4 MPa)			
		Ultimate Load		Allowable Load	
		Tension lbs. (kN)	Shear lbs. (kN)	Tension lbs. (kN)	Shear lbs. (kN)
3/16	3/4 (19.1)	460 (2.1)	550 (2.5)	90 (0.4)	110 (0.5)
	5/8 (15.9)	570 (2.6)	750 (3.3)	115 (0.5)	150 (0.7)
1/4	3/4 (19.1)	790 (3.6)	840 (3.7)	160 (0.7)	170 (0.8)
	1 (25.4)	820 (3.7)	840 (3.7)	165 (0.7)	170 (0.8)
	1-1/4 (31.7)	865 (3.9)	840 (3.7)	175 (0.8)	170 (0.8)

1. Tabulated load values are for anchors installed in multiple wythe, minimum Grade SW, solid clay brick masonry walls conforming to ASTM C 62. Mortar must be minimum Type N. Masonry compressive strength must be at the specified minimum at the time of installation (f'm ≥ 1,500 psi).
2. Allowable load capacities listed are calculated using and applied safety factor of 5.0. Anchors are not recommended for use overhead or for life safety. Consideration of safety factors of 20 or higher may be necessary depending upon the application such as in sustained tensile loading applications.
3. Anchors installed flush with face or end of masonry surface.

## DESIGN CRITERIA

### Combined Loading

For anchors loaded in both shear and tension, the combination of loads should be proportioned as follows:

$$\left(\frac{N_u}{N_n}\right) + \left(\frac{V_u}{V_n}\right) \leq 1$$

Where:  $N_u$  = Applied Service Tension Load  $V_u$  = Applied Service Shear Load  
 $N_n$  = Allowable Tension Load  $V_n$  = Allowable Shear Load

### Load Adjustment Factors for Spacing and Edge Distances in Normal-Weight Concrete<sup>1</sup>

Anchor Dimension	Load Type	Critical Distance (Full Anchor Capacity)	Critical Load Factor	Minimum Distance (Reduced Capacity)	Minimum Load Factor
Spacing (s)	Tension and Shear	$s_{cr} = 10d$	$F_{NS} = F_{VS} = 1.0$	$s_{min} = 5d$	$F_{NS} = F_{VS} = 0.50$
Edge Distance (c)	Tension	$c_{cr} = 12d$	$F_{NC} = 1.0$	$c_{min} = 6d$	$F_{NC} = 0.80$
	Shear	$c_{cr} = 12d$	$F_{VC} = 1.0$	$c_{min} = 6d$	$F_{VC} = 0.50$

1. Allowable load values found in the performance data tables are multiplied by reduction factors when anchor spacing or edge distances are less than critical distances. Linear interpolation is allowed for intermediate anchor spacing and edge distances between critical and minimum distances. When an anchor is affected by both reduced spacing and edge distance, the spacing and edge reduction factors must be combined (multiplied). Multiple reduction factors for anchor spacing and edge distance may be required depending on the anchor group configuration.

## ORDERING INFORMATION

### Mushroom Head Zamac Nailin with Carbon Steel Nail

Catalog Number	Anchor Size	Drill Diameter	Standard Box	Standard Carton	Wt./100
2802	3/16" x 7/8"	3/16"	100	500	3/4
2806	1/4" x 3/4"	1/4"	100	500	1-1/2
2808	1/4" x 1"	1/4"	100	500	1-3/4
2814	1/4" x 1-1/4"	1/4"	100	500	2-1/4
2820	1/4" x 1-1/2"	1/4"	100	500	2-1/2
2826	1/4" x 2"	1/4"	100	500	3
2804	1/4" x 3"	1/4"	100	500	4

The published size includes the diameter and length of the anchor measured from under the shoulder of the anchor body.



### Master Pack Mushroom Head Zamac Nailin with Carbon Steel Nail

Catalog Number	Anchor Size	Drill Diameter	Standard Box	Standard Carton	Wt./100
2803	3/16" x 7/8"	3/16"	–	1,000	3/4
2807	1/4" x 3/4"	1/4"	–	1,000	1-1/2
2809	1/4" x 1"	1/4"	–	1,000	1-3/4
2815	1/4" x 1-1/4"	1/4"	–	1,000	2-1/4
2821	1/4" x 1-1/2"	1/4"	–	1,000	2-1/2
2827	1/4" x 2"	1/4"	–	1,000	3
2805	1/4" x 3"	1/4"	–	1,000	4

The published size includes the diameter and length of the anchor measured from under the shoulder of the anchor body.



### Flat Head Zamac Nailin with Carbon Steel Nailin

Catalog Number	Anchor Size	Drill Diameter	Standard Box	Standard Carton	Wt./100
2836	1/4" x 1-1/2"	1/4"	100	500	2-1/2
2838	1/4" x 2"	1/4"	100	500	3

The published size includes the diameter and length of the anchor measured from under the shoulder of the anchor body.



### Mushroom Head Zamac Nailin with Stainless Steel Nailin

Catalog Number	Anchor Size	Drill Diameter	Standard Box	Standard Carton	Wt./100
2858	1/4" x 1"	1/4"	100	500	1-3/4
2864	1/4" x 1-1/4"	1/4"	100	500	2-1/4
2870	1/4" x 1-1/2"	1/4"	100	500	2-1/2
2876	1/4" x 2"	1/4"	100	500	3

The published size includes the diameter and length of the anchor measured from under the shoulder of the anchor body.



**GENERAL INFORMATION**

**ZAMAC HAMMER-SCREW®**

Nail Anchor

**PRODUCT DESCRIPTION**

The Zamac Hammer-Screw is a unique, one-step nail drive anchor featuring a Phillips type head and a screw thread for use in concrete, block, brick or stone. It is available in 1/4" diameter and lengths ranging from 3/4" to 3". With a body formed from corrosion resistant Zamac alloy and a zinc plated carbon steel drive screw, this anchor has been developed as an improvement over standard nailin anchors.

The Zamac Hammer-Screw has been designed to provide a removable anchor with higher tension load capacities compared with traditional nailin when installed in concrete. The anchor is not recommended for overhead, life-safety or sustained tensile loading applications (see performance data section).

**GENERAL APPLICATIONS AND USES**

- Brick ties and masonry anchorage
- Electrical fixtures
- Signage
- Flashing
- Drywall track
- Maintenance
- Surveillance equipment
- Light gage attachments

**FEATURES AND BENEFITS**

- + General purpose anchoring
- + Installs in a variety of base materials
- + Removable anchor - screw can be backed out with a Phillips head driver

**APPROVALS AND LISTINGS**

- Federal GSA Specification - Meets the proof load requirements of FF-S-325C, Group V, Type 2, Class 3, (superseded) and CID A-A 1925A, Type 1

**GUIDE SPECIFICATIONS**

CSI Divisions: 03 16 00 - Concrete Anchors, 04 05 19.16 - Masonry Anchors and 05 05 19 - Post-Installed Concrete Anchors. Anchors shall be Zamac Hammer-Screw anchors as supplied by DEWALT, Towson, MD. Anchors shall be installed in accordance with published instructions and the Authority Having Jurisdiction.

**INSTALLATION AND MATERIAL SPECIFICATIONS**

**Installation Specifications**

Dimension	Anchor Diameter, d
	1/4
ANSI Drill Bit Size (in.)	1/4
Fixture Clearance Hole (in.)	5/16
Head Height (in.)	9/64
Head Width (in.)	35/64

**Material Specifications**




Anchor Component	Mushroom Head Carbon Steel Screw
Anchor Body	Zamac Alloy
Drive Screw	AISI 1018
Screw Plating/ Coating	ASTM B 633, SC1, Type III (Fe/Zn5)

**Installation Guidelines**

1. Drill a hole into the base material to a depth of at least 1/4" deeper than the required embedment. The tolerances of the drill bit used should meet the requirements of ANSI Standard B212.15. Remove dust and debris from the hole during drilling (e.g. dust extractor) or following drilling (e.g. suction, forced air) to extract loose particles created by drilling.


2. Insert the anchor through the fixture. Drive the screw into the anchor body to expand it. Be sure the head is seated firmly against the fixture and that the anchor is at the proper embedment. Take care not to overdrive the screw. This anchor is not recommended for installations at an angle or for use overhead.

Optional: To remove – Press a Phillips screw driver firmly into the screw head and turn counterclockwise. Remove the screw from the anchor body, then pry out the fixture and anchor body simultaneously by working the claw of a hammer under the fixture

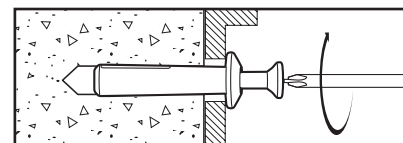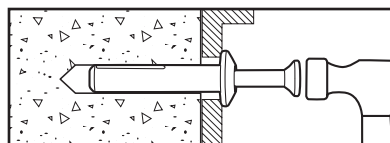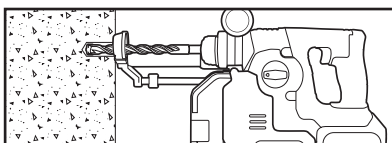

**SECTION CONTENTS**

General Information..... 1  
 Installation and Material Specifications ..... 1  
 Performance Data..... 2  
 Design Criteria ..... 3  
 Ordering Information..... 3



ZAMAC HAMMER-SCREW

**ANCHOR MATERIALS**

- Zamac Alloy body with Carbon Steel Drive Screw

**ANCHOR SIZE RANGE (TYP.)**

- 1/4" x 3/4" to 1/4" x 3" diameter

**SUITABLE BASE MATERIALS**

- Normal-Weight Concrete
- Concrete Masonry (CMU)
- Brick Masonry
- Stone

## PERFORMANCE DATA

### Ultimate and Allowable Load Capacities for Zamac Hammer-Screw in Normal-Weight Concrete<sup>1,2,3,4,5</sup>

Rod/ Anchor Diameter d in. (mm)	Min. Embed. Depth h, in. (mm)	Minimum Concrete Compressive Strength, f 'c											
		2,000 psi				4,000 psi				6,000 psi			
		Tension		Shear		Tension		Shear		Tension		Shear	
		Ultimate lbs. (kN)	Allowable lbs. (kN)	Ultimate lbs. (kN)	Allowable lbs. (kN)	Ultimate lbs. (kN)	Allowable lbs. (kN)	Ultimate lbs. (kN)	Allowable lbs. (kN)	Ultimate lbs. (kN)	Allowable lbs. (kN)	Ultimate lbs. (kN)	Allowable lbs. (kN)
1/4 (6.4)	5/8 (16)	675 (3.0)	170 (0.8)	650 (2.9)	165 (0.7)	850 (3.8)	215 (1.0)	880 (3.9)	220 (1.0)	890 (4.0)	225 (1.0)	880 (3.9)	220 (1.0)
	3/4 (19)	790 (3.5)	200 (0.9)	805 (3.6)	200 (0.9)	1,135 (5.0)	285 (1.3)	1,115 (5.0)	280 (1.2)	1,190 (5.3)	300 (1.3)	1,115 (5.0)	280 (1.2)
	7/8 (22)	930 (4.1)	235 (1.0)	990 (4.4)	250 (1.1)	1,205 (5.4)	300 (1.3)	1,230 (5.5)	310 (1.4)	1,250 (5.6)	315 (1.4)	1,230 (5.5)	310 (1.4)
	1-1/8 (29)	1,220 (5.4)	305 (1.4)	1,365 (6.1)	340 (1.5)	1,350 (6.0)	340 (1.5)	1,470 (6.5)	370 (1.6)	1,450 (6.4)	365 (1.6)	1,470 (6.5)	370 (1.6)
	1-3/8 (35)	1,325 (5.9)	330 (1.5)	1,555 (6.9)	390 (1.7)	1,450 (6.4)	365 (1.6)	1,645 (7.3)	410 (1.8)	1,530 (6.8)	385 (1.7)	1,645 (7.3)	410 (1.8)
	1-3/4 (44)	1,480 (6.6)	370 (1.6)	1,840 (8.2)	460 (2.0)	1,600 (7.1)	400 (1.8)	1,910 (8.5)	480 (2.1)	1,660 (7.4)	415 (1.8)	1,910 (8.5)	480 (2.1)
	1-7/8 (48)	1,480 (6.6)	370 (1.6)	1,840 (8.2)	460 (2.0)	1,600 (7.1)	400 (1.8)	1,910 (8.5)	480 (2.1)	1,660 (7.4)	415 (1.8)	1,910 (8.5)	480 (2.1)

1. Tabulated load values are for anchors installed in concrete. Concrete compressive strength must be at the specified minimum at the time of installation.
2. Allowable load capacities listed are calculated using an applied safety factor of 4.0. Anchors are not recommended for use overhead or for life safety. Consideration of safety factors of 20 or higher may be necessary depending on the application, such as in sustained tensile loading applications.
3. Linear interpolation may be used to determine allowable loads for anchors at intermediate embedment depths and compressive strengths.
4. The tabulated load values are applicable to single anchors installed at critical edge and spacing distances. Allowable load capacities are multiplied by reduction factors when anchor spacing or edge distances are less than critical distances.
5. Anchors installed flush with face or end of concrete surface.

### Ultimate and Allowable Load Capacities for Zamac Hammer-Screw in Hollow Concrete Masonry<sup>1,2,3,4</sup>

Nominal Anchor Diameter d in. (mm)	Minimum Embedment Depth h, in. (mm)	f m ≥ 1,500 psi (10.4 MPa)			
		Ultimate Load		Allowable Load	
		Tension lbs. (kN)	Shear lbs. (kN)	Tension lbs. (kN)	Shear lbs. (kN)
1/4 (6.4)	5/8 (15.9)	420 (1.9)	1,160 (5.2)	85 (0.4)	230 (1.0)
	3/4 (19.1)	825 (3.7)	1,215 (5.5)	165 (0.7)	245 (1.1)
	1 (25.4)	1,000 (4.5)	1,265 (5.7)	200 (0.9)	255 (1.1)
	1-1/8 (28.6)	1,090 (4.9)	1,290 (5.8)	220 (1.0)	260 (1.2)
	1-3/8 (34.9)	1,145 (5.2)	1,345 (6.1)	230 (1.0)	270 (1.2)
	1-1/2 (38.1)	1,145 (5.2)	1,345 (6.1)	230 (1.0)	270 (1.2)

1. Tabulated load values are for anchors installed in minimum 6-inch wide, Grade N, Type II, medium and normal-weight and lightweight concrete masonry units. Mortar must be Type N, S or M. Masonry compressive strength must be 1,500 psi minimum at the time of installation. Hollow masonry cells may also be grouted or solid.
2. The tabulated values are for anchors installed at a minimum of 16 anchor diameters on center for 100 percent capacity. Spacing distances may be reduced to 8 anchor diameters on center provided the capacities are reduced by 50 percent. Linear interpolation may be used for intermediate spacing.
3. Allowable load capacities listed are calculated using and applied safety factor of 5.0. Anchors are not recommended for use overhead or for life safety. Consideration of safety factors of 20 or higher may be necessary depending upon the application such as in sustained tensile loading applications.
4. Anchors installed flush with face or end of masonry surface.

MECHANICAL ANCHORS

Nail Anchor

ZAMAC HAMMER-SCREW®

**Ultimate and Allowable Load Capacities for Zamac-Hammer Screw in Solid Clay Brick Masonry<sup>1,2,3,4</sup>**

Nominal Anchor Diameter d in. (mm)	Minimum Embedment Depth h in. (mm)	f'm ≥ 1,500 psi (10.4 MPa)			
		Ultimate Load		Allowable Load	
		Tension lbs. (kN)	Shear lbs. (kN)	Tension lbs. (kN)	Shear lbs. (kN)
1/4 (6.4)	5/8 (15.9)	680 (3.1)	1,025 (4.6)	135 (0.6)	205 (0.9)
	3/4 (19.1)	930 (4.2)	1,200 (5.3)	185 (0.8)	240 (1.1)
	1 (25.4)	990 (4.5)	1,350 (6.0)	200 (0.9)	270 (1.2)
	1-1/8 (28.6)	1,040 (4.7)	1,350 (6.0)	210 (0.9)	270 (1.2)
	1-3/8 (34.9)	1,150 (5.2)	1,350 (6.0)	230 (1.0)	270 (1.2)
	1-1/2 (38.1)	1,260 (5.7)	1,350 (6.0)	250 (1.1)	270 (1.2)

1. Tabulated load values are for anchors installed in multiple wythe, minimum Grade SW, solid clay brick masonry walls conforming to ASTM C 62. Mortar must be minimum Type N. Masonry compressive strength must be at the specified minimum at the time of installation (f'm ≥ 1,500 psi).

2. The tabulated values are for anchors installed at a minimum of 16 anchor diameters on center for 100 percent capacity. Spacing distances may be reduced to 8 anchor diameters on center provided the capacities are reduced by 50 percent. Linear interpolation may be used for intermediate spacing.

3. Allowable load capacities listed are calculated using and applied safety factor of 5.0. Anchors are not recommended for use overhead or for life safety. Consideration of safety factors of 20 or higher may be necessary depending upon the application such as in sustained tensile loading applications.

4. Anchors installed flush with face or end of masonry surface.

**DESIGN CRITERIA**

**Combined Loading**

For anchors loaded in both shear and tension, the combination of loads should be proportioned as follows:

$$\left(\frac{N_u}{N_n}\right) + \left(\frac{V_u}{V_n}\right) \leq 1$$

Where:  $N_u$  = Applied Service Tension Load       $V_u$  = Applied Service Shear Load  
 $N_n$  = Allowable Tension Load                       $V_n$  = Allowable Shear Load

**Load Adjustment Factors for Spacing and Edge Distances in Normal-Weight Concrete<sup>1</sup>**


Anchor Dimension	Load Type	Critical Distance (Full Anchor Capacity)	Critical Load Factor	Minimum Distance (Reduced Capacity)	Minimum Load Factor
Spacing (s)	Tension and Shear	$S_{cr} = 10d$	$F_{NS} = F_{VS} = 1.0$	$S_{min} = 5d$	$F_{NS} = F_{VS} = 0.50$
Edge Distance (c)	Tension	$C_{cr} = 12d$	$F_{NC} = 1.0$	$C_{min} = 6d$	$F_{NC} = 0.80$
	Shear	$C_{cr} = 12d$	$F_{VC} = 1.0$	$C_{min} = 6d$	$F_{VC} = 0.50$

1. Allowable load values found in the performance data tables are multiplied by reduction factors when anchor spacing or edge distances are less than critical distances. Linear interpolation is allowed for intermediate anchor spacing and edge distances between critical and minimum distances. When an anchor is affected by both reduced spacing and edge distance, the spacing and edge reduction factors must be combined (multiplied). Multiple reduction factors for anchor spacing and edge distance may be required depending on the anchor group configuration.

**ORDERING INFORMATION**

**Mushroom Head with No. 2 Phillips Head Screw**

Cat No.	Anchor Size	Drill Diameter	Std. Box	Std. Carton	Wt./100
2839	1/4" x 3/4"	1/4"	100	500	1-1/2
2840	1/4" x 1"	1/4"	100	500	1-3/4
2842	1/4" x 1-1/4"	1/4"	100	500	2-1/4
2844	1/4" x 1-1/2"	1/4"	100	500	2-1/2
2846	1/4" x 2"	1/4"	100	500	3
2848	1/4" x 2-1/4"	1/4"	100	500	3-1/2
2850	1/4" x 3"	1/4"	100	500	4-1/4



The published size includes the diameter and length of the anchor measured from under the shoulder of the anchor body.

**Master Pack**

Cat No.	Anchor Size	Drill Diameter	Std. Carton	Wt./100
2939	1/4" x 3/4"	1/4"	1,000	1-1/2
2940	1/4" x 1"	1/4"	1,000	1-3/4
2942	1/4" x 1-1/4"	1/4"	1,000	2-1/4
2944	1/4" x 1-1/2"	1/4"	1,000	2-1/2
2946	1/4" x 2"	1/4"	1,000	3
2948	1/4" x 2-1/4"	1/4"	1,000	3-1/2
2949	1/4" x 3"	1/4"	1,000	4-1/4

The published size includes the diameter and length of the anchor measured from under the shoulder of the anchor body.

**GENERAL INFORMATION**

**NYLON NAILIN®**

Nail Anchor

**PRODUCT DESCRIPTION**

The Nylon Nailin is a nail drive anchor with a body formed from engineered plastic and drive nails available in carbon and stainless steel. The anchor can be used in concrete, block, brick or stone. The anchor is pre-assembled with either a carbon steel or stainless steel nail. This anchor is not recommended for overhead, life-safety or sustained tensile loading applications.

**GENERAL APPLICATIONS AND USES**

- Brick Ties and Masonry Anchorage
- Maintenance
- Furring Strips
- Copper Flashing
- Electrical Fixtures
- Aluminum Frames

**FEATURES AND BENEFITS**

- + General purpose anchoring
- + Installs in a variety of base materials

**APPROVALS AND LISTINGS**

- Federal GSA Specification – Meets the proof load requirements of FF-S-325C, Group V, Type 2, Class 4, (superseded) and CID A-A 1925A, Type 3 (mushroom head), Type 4 (flat head) and Type 5 (round head)

**GUIDE SPECIFICATIONS**

CSI Divisions: 03 16 00 - Concrete Anchors, 04 05 19.16 - Masonry Anchors and 05 05 19 - Post-Installed Concrete Anchors. Anchors shall be Nylon Nailin anchors as supplied by DEWALT, Towson, MD. Anchors shall be installed in accordance with published instructions and the Authority Having Jurisdiction.

**SECTION CONTENTS**

General Information..... 1  
 Installation and Material Specifications ..... 1  
 Performance Data ..... 2  
 Design Criteria ..... 2  
 Ordering Information ..... 3



ROUND HEAD NYLON NAILIN



FLAT HEAD NYLON NAILIN



MUSHROOM HEAD NYLON NAILIN

**ANCHOR MATERIALS**

- Nylon Body with Carbon or Stainless Steel Drive Nail

**ANCHOR SIZE RANGE (TYP.)**

- 3/16" diameter x 1" length to 1/4" diameter x 6" length

**SUITABLE BASE MATERIALS**

- Normal-Weight Concrete
- Hollow Concrete Masonry
- Brick Masonry
- Stone

**INSTALLATION AND MATERIAL SPECIFICATIONS**

**Installation Specifications**


Dimension	Anchor Diameter, d					
	3/16"			1/4"		
	RH	FH	MH	RH	FH	MH
ANSI Drill Bit Size (in.)	3/16	3/16	3/16	1/4	1/4	1/4
Fixture Clearance Hole (in.)	1/4	1/4	1/4	5/16	5/16	5/16
Head Height (in.)	1/8	1/8	1/8	1/8	1/8	1/8
Head Width (in.)	3/8	3/8	9/16	7/16	7/16	9/16

**Material Specifications**


Anchor Component	Component Material			
	Round Head	Flat Head	Mushroom Head	
			Carbon	Stainless
Drive Nail	AISI 1018	AISI 1018	AISI 1018	Type 304 SS
Anchor Body	Nylon	Nylon	Nylon	Nylon
Nail Plating	ASTM B 633, SC1, Type III (Fe/Zn 5)			N/A

**Installation Guidelines**

Using the proper diameter bit, drill a hole into the base material to a depth of at least 1/4" deeper than the required embedment. The tolerances of the drill bit used should meet the requirements of ANSI Standard B212.15. Remove dust and debris from the hole during (e.g. dust extractor) or following drilling (e.g. suction, forced air) to extract loose particles created by drilling.



Insert the anchor through the fixture and into the drilled hole. Drive the nail into the anchor body to expand it. Be sure the head is seated firmly against the fixture and that the anchor is at the proper embedment. Take care not to overdrive the nail. This anchor is not recommended for installations at an angle or for use overhead.



**PERFORMANCE DATA**

**Ultimate and Allowable Load Capacities for Nylon Nailin in Normal-Weight Concrete<sup>1,2,3</sup>**

Anchor Diameter d in.	Minimum Embedment Depth in.	Minimum Concrete Compressive Strength, f'c											
		2,000 psi				4,000 psi				6,000 psi			
		Tension		Shear		Tension		Shear		Tension		Shear	
		Ultimate lbs.	Allowable lbs.	Ultimate lbs.	Allowable lbs.	Ultimate lbs.	Allowable lbs.	Ultimate lbs.	Allowable lbs.	Ultimate lbs.	Allowable lbs.	Ultimate lbs.	Allowable lbs.
3/16	3/4	180	45	280	70	195	50	320	80	200	50	320	80
	1	200	50	280	70	220	55	320	80	230	60	320	80
1/4	5/8	120	30	320	80	140	35	500	125	180	45	500	125
	3/4	200	50	320	80	220	55	500	125	240	60	500	125
	1	230	60	320	80	250	65	500	125	260	65	500	125
	1-1/2	240	60	320	80	270	70	500	125	280	70	500	125
	2	250	65	320	80	280	70	500	125	280	70	500	125

1. Tabulated load values are for anchors installed in concrete. Concrete compressive strength must be at the specified minimum at the time of installation.
2. Allowable load capacities listed are calculated using an applied safety factor of 4.0. Anchors are not recommended for use overhead or for life safety.
3. The tabulated load values are applicable to single anchors installed at critical edge and spacing distances. Allowable load capacities are multiplied by reduction factors when anchor spacing or edge distances are less than critical distances.

**Ultimate and Allowable Load Capacities for Nylon Nailin in Hollow Concrete Masonry<sup>1,2</sup>**

Anchor Diameter d in.	Minimum Embedment Depth in.	f'm ≥ 1,500 psi			
		Ultimate Load		Allowable Load	
		Tension lbs.	Shear lbs.	Tension lbs.	Shear lbs.
3/16	3/4	170	280	35	55
	1	180	280	35	55
1/4	5/8	110	320	20	65
	3/4	160	320	30	65
	1	170	320	35	65
	1-1/4	180	320	35	65
	1-1/2	200	320	40	65

1. Tabulated load values are for anchors installed in minimum 6-inch wide, Grade N, Type II, medium and normal-weight concrete masonry units. Mortar must be minimum Type N. Masonry compressive strength must be 1,500 psi minimum at the time of installation.
2. Allowable loads are based on average ultimate values using a safety factor of 5.0. Anchors are not recommended for use overhead or for life safety.

**Ultimate and Allowable Load Capacities for Nylon Nailin in Solid or Hollow Clay Brick Masonry<sup>1,2</sup>**

Anchor Diameter d in.	Minimum Embedment Depth in.	f'm ≥ 1,500 psi			
		Ultimate Load		Allowable Load	
		Tension lbs.	Shear lbs.	Tension lbs.	Shear lbs.
3/16	3/4	155	320	30	65
	1	170	320	35	65
1/4	5/8	150	500	30	100
	3/4	200	500	40	100
	1	220	500	45	100
	1-1/4	240	500	50	100
	1-1/2	250	500	50	100

1. Tabulated load values are for anchors installed in Grade SW multiple wythe, solid brick masonry conforming to ASTM C62.
2. Allowable loads are calculated using an applied safety factor of 5.0. Anchors are not recommended for use overhead or for life safety.

**DESIGN CRITERIA**

**Combined Loading**

For anchors loaded in both shear and tension, the combination of loads should be proportioned as follows:

$$\left(\frac{N_u}{N_n}\right) + \left(\frac{V_u}{V_n}\right) \leq 1$$

Where:  $N_u$  = Applied Service Tension Load  $V_u$  = Applied Service Shear Load  
 $N_n$  = Allowable Tension Load  $V_n$  = Allowable Shear Load

**Load Adjustment Factors for Spacing and Edge Distances in Normal-Weight Concrete<sup>1</sup>**

Anchor Dimension	Load Type	Critical Distance (Full Anchor Capacity)	Critical Load Factor	Minimum Distance (Reduced Capacity)	Minimum Load Factor
Spacing (s)	Tension and Shear	$S_{cr} = 10d$	$F_N = F_V = 1.0$	$S_{min} = 5d$	$F_N = F_V = 0.50$
Edge Distance (c)	Tension	$C_{cr} = 12d$	$F_N = 1.0$	$C_{min} = 5d$	$F_N = 0.80$
	Shear	$C_{cr} = 12d$	$F_V = 1.0$	$C_{min} = 5d$	$F_V = 0.50$

1. Allowable load values found in the performance data tables are multiplied by reduction factors when anchor spacing or edge distances are less than critical distances. Linear interpolation is allowed for intermediate anchor spacing and edge distances between critical and minimum distances. When an anchor is affected by both reduced spacing and edge distance, the spacing and edge reduction factors must be combined (multiplied). Multiple reduction factors for anchor spacing and edge distance may be required depending on the anchor group configuration.



**ORDERING INFORMATION**

**Round Head Nylon Nailin with Carbon Steel Nail**

Catalog Number	Anchor Size	Drill Dia.	Std. Box	Std. Carton	Wt./100
2431	3/16" x 1"	3/16"	100	1,000	1/2
2451	3/16" x 1-1/2"	3/16"	100	1,000	3/4
2521	1/4" x 1"	1/4"	100	1,000	3/4
2541	1/4" x 1-1/2"	1/4"	100	1,000	1
2561	1/4" x 2"	1/4"	100	1,000	1



**Flat Head Nylon Nailin with Carbon Steel Nail**

Catalog Number	Anchor Size	Drill Dia.	Std. Box	Std. Carton	Wt./100
2432	3/16" x 1"	3/16"	100	1,000	1/2
2452	3/16" x 1-1/2"	3/16"	100	1,000	3/4
2522	1/4" x 1"	1/4"	100	1,000	3/4
2542	1/4" x 1-1/2"	1/4"	100	1,000	1
2562	1/4" x 2"	1/4"	100	1,000	1



**Mushroom Head Nylon Nailin**

Catalog Number		Anchor Size	Drill Diameter	Std. Box	Std. Carton	Wt./100
Carbon	Stainless					
2433	-	3/16" x 1"	3/16"	100	1,000	1/2
2513	-	1/4" x 3/4"	1/4"	100	1,000	1/2
2523	2528	1/4" x 1"	1/4"	100	1,000	3/4
2543	2548	1/4" x 1-1/2"	1/4"	100	1,000	1
2563	-	1/4" x 2"	1/4"	100	1,000	1
2573	-	1/4" x 3"	1/4"	100	1,000	2-1/4
2583	-	1/4" x 4"	1/4"	100	1,000	2-3/4
2593	-	1/4" x 6"	1/4"	100	400	4



**Mushroom Head Bodies Only**

Catalog Number	Anchor Size	Drill Dia.	Std. Box	Std. Carton	Wt./100
2574	1/4" x 3"	1/4"	2500	2500	1/2

